




BISON POWER-Strive for A Bright
Oasis of Power.



HIGH PRESSURE WASHER ➤

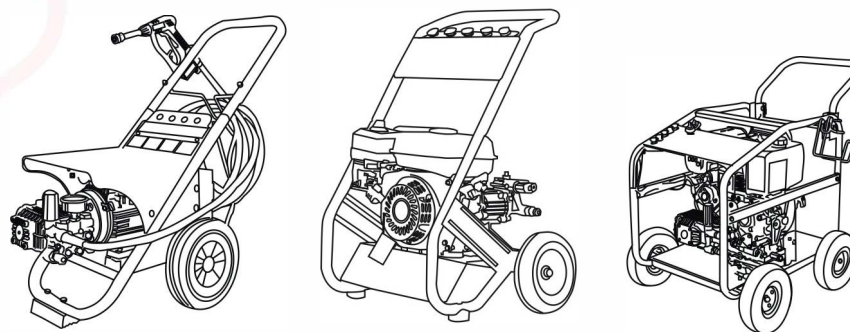

WE ARE PARTNER, WE ARE FAMILY



TAIZHOU BISON MACHINERY CO., LTD, is one of the Chinese leading manufacturers of generators, water pumps, engines etc. BISON brand has won its reputation among the areas like South America, Europe, Africa, Southeast Asia, by supplying qualified products and professional after-sale service. We are looking forward to establishing more win-win cooperation with customers all around the world.

ABOUT US



GASOLINE HIGH PRESSURE WASHER

BS-130A

1300PSI GASOLINE HIGH PRESSURE WASHER



FOUR-STROKE
OHV ENGINE



LOW OPERATING
NOISE



PROVIDE HIGH
PRESSURE FLOW RATE



DIFFERENT NOZZLE
MULTIPURPOSE

○ FEATURES:

1. Powerful & durable OHV engine with low oil protection
2. Brass & aluminum pump, high performance & suitable for various cleaning needs
3. Professional high pressure nozzles with 0°, 15°, 25°, 40°, soap nozzles 65°
4. Convenient onboard accessory storage, 6m to 10m high pressure hose optional
5. New design & strong frame will protect the washer better



Model	Max. Pressure		Water Flow		Gasoline Engine		G.W	Packing Dim	Container Loading	
	Bar	PSI	LPM	GPM	Hose Power	R.P.M			20'	40'
BS-130A	90	1300	9	2.4	3.0HP	3400	26	50×40×47.5	281	650
BS-130B	90	1300	9	2.4	3.0HP	3400	27	64.5×40.5×51.5	200	525



GASOLINE HIGH PRESSURE WASHER

BS-150B

2200PSI GASOLINE HIGH PRESSURE WASHER



FOUR-STROKE
OHV ENGINE



LOW OPERATING
NOISE



PROVIDE HIGH
PRESSURE FLOW RATE



DIFFERENT NOZZLE
MULTIPURPOSE

FEATURES:

1. Powerful & durable OHV engine with low oil protection
2. Brass & aluminum pump, high performance & suitable for various cleaning needs
3. Professional high pressure nozzles with 0°, 15°, 25°, 40°, soap nozzles 65°
4. Convenient onboard accessory storage, 6m to 10m high pressure hose optional
5. New design & strong frame will protect the washer better



Model	Max. Pressure		Water Flow		Gasoline Engine		G.W	Packing Dim	Container Loading	
	Bar	PSI	LPM	GPM	Hose Power	R.P.M			20'	40'
BS-150A	150	2200	9	2.4	5.5HP	3400	30	51.5×46×51.5	220	575
BS-150B	150	2200	9	2.4	5.5HP	3400	30	64.5×40.5×51.5	200	525
BS-150C	150	2200	9	2.4	5.5HP	3400	36	61.5×44×53.5	180	475
BS-150D	150	2200	9	2.4	5.5HP	3400	30	64.5×40.5×51.5	200	525



Pump:BS-P150

GASOLINE HIGH PRESSURE WASHER

BS-170D

2500PSI GASOLINE HIGH PRESSURE WASHER



FOUR-STROKE
OHV ENGINE



LOW OPERATING
NOISE



PROVIDE HIGH
PRESSURE FLOW RATE



DIFFERENT NOZZLE
MULTIPURPOSE

○ FEATURES:

1. Powerful & durable OHV engine with low oil protection
2. Brass & aluminum pump, high performance & suitable for various cleaning needs
3. Professional high pressure nozzles with 0°, 15°, 25°, 40°, soap nozzles 65°
4. Convenient onboard accessory storage, 6m to 10m high pressure hose optional
5. New design & strong frame will protect the washer better



Model	Max.Pressure		Water Flow		Gasoline Engine		G.W	Packing Dim	Container Loading	
	Bar	PSI	LPM	GPM	Hose Power	R.P.M	Kg	L×W×H	20'	40'
BS-170A	170	2500	9	2.4	6.5HP	3400	31	51.5×46×51.5	220	575
BS-170B	170	2500	9	2.4	6.5HP	3400	31	65×41×51.5	200	525
BS-170C	170	2500	9	2.4	6.5HP	3400	37	61.5×44×53.5	180	475
BS-170D	170	2500	9	2.4	6.5HP	3400	31	65.5×41×51.5	200	525



DIESEL HIGH PRESSURE WASHER

BS-D250

3600PSI DIESEL HIGH PRESSURE WASHER



FOUR-STROKE
ENGINE



LOW OPERATING
NOISE



PROVIDE HIGH
PRESSURE FLOW RATE



DIFFERENT NOZZLE
MULTIPURPOSE

○ FEATURES:

1. Powerful & durable engine with low oil protection
2. Brass & aluminum pump, high performance & suitable for various cleaning needs
3. Professional high pressure nozzles with 0°, 15°, 25°, 40°, soap nozzles 65°
4. Convenient onboard accessory storage, 6m to 10m high pressure hose optional
5. New design & strong frame will protect the washer better



Model	Max. Pressure		Water Flow		Gasoline Engine		G.W	Packing Dim	Container Loading	
	Bar	PSI	LPM	GPM	Hose Power	R.P.M			20'	40'
BS-D170	170	2500	18	4.8	6HP	3400	83	84X53X66	87	232
BS-D250	250	3600	18	4.8	6HP	3400	93	84X53X66	87	232



DIESEL HIGH PRESSURE WASHER

BS-D200

3600PSI DIESEL HIGH PRESSURE WASHER



FOUR-STROKE
ENGINE



LOW OPERATING
NOISE



PROVIDE HIGH
PRESSURE FLOW RATE



DIFFERENT NOZZLE
MULTIPURPOSE



○ FEATURES:

1. Powerful & durable engine with low oil protection
2. Brass & aluminum pump, high performance & suitable for various cleaning needs
3. Professional high pressure nozzles with 0°, 15°, 25°, 40°, soap nozzles 65°
4. Convenient onboard accessory storage, 6m to 10m high pressure hose optional
5. New design & strong frame will protect the washer better



Model	Max.Pressure		Water Flow		Diesel Engine		G.W	Packing Dim	Container Loading	
	Bar	PSI	LPM	GPM	ENGINE TYPE	R.P.M	Kg	L×W×H	20'	40'
BS-D200	200	2900	18	4.8	186FE	3400	85	795*515*685mm	96	596



ELECTRIC HIGH PRESSURE WASHER

BS-380

HIGH PRESSURE WASHER



FOUR-STROKE
OHV ENGINE



LOW OPERATING
NOISE



PROVIDE HIGH
PRESSURE FLOW RATE



DIFFERENT NOZZLE
MULTIPURPOSE

○ FEATURES:

1. Brass & aluminum pump, high performance & suitable for various cleaning needs
2. Professional high pressure nozzles with 0°, 15°, 25°, 40°, soap nozzles 65°
3. Convenient onboard accessory storage, 6m to 10m high pressure hose optional
4. New design & strong frame will protect the washer better

Model	Power	Max Pressure	Speed	Flow	Voltage
BS-380	1600W	60bar/870psi	2800RPM	≤ 10L/min	220V/50Hz





ELECTRIC HIGH PRESSURE WASHER

BS-1508B



BS-1508E



○ FEATURES:

1. Shutdown, small size, large pressure
3. built-in thermal protection device

2. special induction motor
4. home self-priming cleaning machine

BS-1508B	1000W	1300W	1500W
Motor type	Induction motor		
Working pressure	60bar/870psi	70bar/1000psi	80bar/1160psi
Flow	6.5L/min		
Voltage	220V/50Hz		
Speed	2800RPM		

BS-1508E	1300W	1500W	1800W
Motor type	Induction motor		
Working pressure	70bar/1000psi	80bar/1160psi	90bar/1300psi
Flow	6.5L/min		
Voltage	220V/50Hz		
Speed	2800RPM		




ELECTRIC HIGH PRESSURE WASHER



○ FEATURES:

1. Shutdown, small size, large pressure
2. special induction motor
3. built-in thermal protection device
4. home self-priming cleaning machine

BS-1508A/BS-1808A	1000W	1300W	1500W	1800W
Motor type	Induction motor			
Working pressure	60bar/870psi	70bar/1000psi	80bar/1160psi	90bar/1300psi
Flow	6.5L/min			
Voltage	220V/50Hz			
Speed	2800RPM			



ELECTRIC HIGH PRESSURE WASHER

BS-1210

ELECTRODYNAMIC INDUCTION
HIGH PRESSURE WASHER

MOTOR
100%

100% COPPER WIRE
MOTOR



LOW OPERATING
NOISE



PROVIDE HIGH
PRESSURE FLOW RATE



DIFFERENT NOZZLE
MULTIPURPOSE

○ FEATURES:

1. Shutdown, small size, large pressure
2. special induction motor
3. built-in thermal protection device
4. home self-priming cleaning machine

Model	BS-1210A	BS-1210B	BS-1210C
Working pressure	100bar/1500psi		
Max Pressure	130bar/1850psi		
Theoretical Flow	12.7L/min	13.7L/min	12.7L/min
Motive Power	2.2KW	1.8KW	1.8KW
Voltage	220V	220V	220V
Speed	2800RPM	2800RPM	2800RPM



ELECTRIC HIGH PRESSURE WASHER

BS-1410

1850PSI ELECTRIC HIGH PRESSURE WASHER



100% COPPER WIRE
MOTOR



LOW OPERATING
NOISE



PROVIDE HIGH
PRESSURE FLOW RATE



DIFFERENT NOZZLE
MULTIPURPOSE

○ FEATURES:

1. Shutdown, small size, large pressure
2. special induction motor
3. built-in thermal protection device
4. home self-priming cleaning machine

Model	BS-1410
Working pressure	80bar/1160psi
Max Pressure	100bar/1500psi
Theoretical Flow	12.7L/min
Motive Power	1.8KW
Voltage	220V
Speed	2800RPM

Note: you can choose the sensor function.



ELECTRIC HIGH PRESSURE WASHER

BS-2500

2500PSI ELECTRIC HIGH PRESSURE WASHER



100% COPPER WIRE
MOTOR



LOW OPERATING
NOISE



PROVIDE HIGH
PRESSURE FLOW RATE



DIFFERENT NOZZLE
MULTIPURPOSE

○ FEATURES:

1. Strong 100% copper wire motor with high grade machine waterproof
2. Brass & aluminum pump, high performance & suitable for various cleaning needs
3. Professional high pressure nozzles with 0°, 15°, 25°, 40°, soap nozzles 65°
4. Convenient onboard accessory storage, 6m to 10m high pressure hose optional
5. New design & strong frame will protect the washer better



BS-2500B



220V BS-2500



380V BS-2500P



Model	Motor type	Working pressure	Motive Power	Voltage	Speed
BS-2500	130bar/2200psi	14.5L/min	2.2KW	220V	1400RPM
BS-2500P	150bar/2200psi	14.5L/min	3KW	380V	1400RPM
BS-2500B	110bar/1850psi	12.7L/min	2.2KW	220V	2800RPM
BS-2600	180bar/2600psi	15L/min	4KW	380V	1400RPM
BS-2900	200bar/2900psi	15L/min	5.5KW	380V	1400RPM
BS-3600	250bar/3600psi	15L/min	7.5KW	380V	1400RPM
BS-3600A	250bar/3600psi	11L/min	5.5KW	380V	1400RPM

WE ARE PARTNER, WE ARE FAMILY







VACUUM CLEANER

BS-35L

35L1500W VACUUM CLEANER



BS-30L



BS-60L

○ FEATURES:

1. Suction strong caliber, industrial waste livestock excreta domestic waste is not a problem
2. Side brush side suction double clean, not only can suck away the surface of the garbage can also brush the dust attached to the above
3. Hygroscopicity is good, with new technology, can absorb water and wet garbage
4. With a flat nozzle, apply to the corner, the door, the door corner, sofa gap

Parameter



ITEM

BS-20L

BS-30L

BS-35L

BS-60L


BS-70L

BS-80L

Fuction	Wet and dry	Wet and dry	Wet and dry	Wet and dry	Wet and dry	Wet and dry
Motor	/	/	/	/	Double motor	Double motor
Mode of cooling	Circulating air cooling	Circulating air cooling	Circulating air cooling	Circulating air cooling	Circulating air cooling	Circulating air cooling
Power	1500W	1200W	1500W	1500W	2400W	3600W
Capacity	20L	30L	35L	60L	70L	80L
Height	57cm	45cm	76cm	88cm	93cm	95cm
Tank diameter	32cm	32cm	32cm	38cm	43.5cm	43.5cm
Air flow rate	53L/S	45L/S	53L/S	53L/S	106L/S	120L/S
Vaccum suction	200mbar	170mbar	200mbar	200mbar	200mbar	220mbar
Voltage	220~240V	220~240V	220~240V	220~240V	220~240V	220~240V
Length of the cable	5m	5m	5m	5m	5m	5m
G.W	10.3kgs	11kgs	12.6kgs	17kgs	25.1kgs	28kgs
Carton dimension	46*46*58cm	39.5*39.5*67cm	46*46*81cm	50*50*90cm	54*59*96cm	53*57*100cm

WE ARE PARTNER, WE ARE FAMILY

VACUUM CLEANER

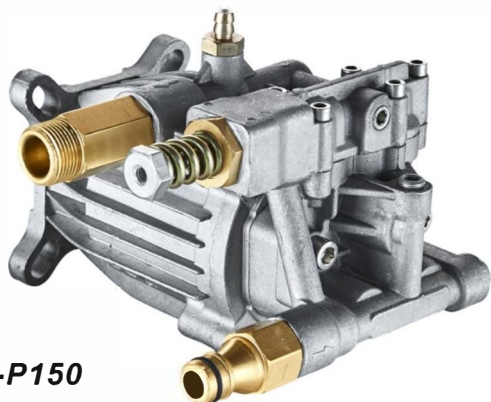


BS-P150

Pump Features:

Motor and engine drive
Stainless steel plunger
Pressure adjustable
built-in self suction unloader

Optional:

Thermal relief valve

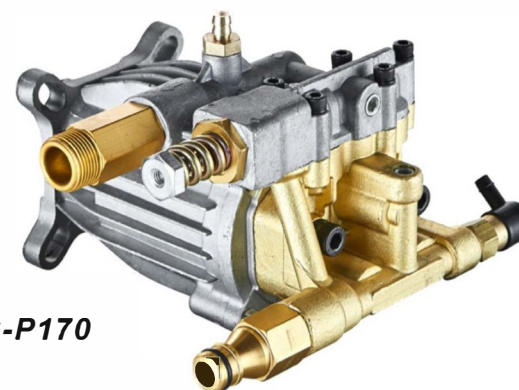

BS-P170

Pump Features:

Motor and engine drive
Stainless steel plunger
Pressure adjustable
built-in self suction unloader

Model	Allow Max. Pressure		Water Flow		Hose Power	Driver		G.W	Packing Dim
	Bar	PSI	LPM	GPM		R.P.M	Bent axle OD		
BS-P150	150	2200	9	2.4	6.5	3600	16mm	2.3	24×24×19
BS-P170	170	2500	9	2.4	6.5	3600	19.05mm 20mm	3.1	24×24×19



BS-P180H



BS-P200

Pump Features:

1. Motor and engine drive;
2. Anodized crankcase;
3. Forged brass cylinder;
4. Ceramic plunger;
5. Pressure adjustable;
6. Built-in self suction unloader;
7. Quick connect outlet;

Optional:

1. Fixed rate chemical injector
2. Pressure gauge
3. Thermal relief valve

Model	Allow Max. Pressure		Water Flow		Driver		G.W	Packing Dim
	Bar	PSI	LPM	GPM	R.P.M	Bent axle OD(mm)	Kg	L×W×H(mm)
BS-P180H	180	2600	10	2.7	3400	19.05	3.4	280×210×200
	180	2600	8.2	2.2	2900	20	3.8	280×210×200
BS-P200	200	2900	18	4.8	3400	19.05	5.4	290×260×220
	200	2900	15	4.0	2900	25.4	5.6	290×260×220
	200	2900	11	2.9	1450	28	5.9	290×260×220



קומנקר פאמפ

Pump Features:

1. Motor and engine drive;
2. Anodized crankcase;
3. Forged brass cylinder;
4. Ceramic plunger;
5. Pressure adjustable;
6. Built-in self suction unloader;
7. Quick connect outlet;

BS-P250A



Pump Features:

1. Motor and engine drive;
2. Anodized crankcase;
3. Forged brass cylinder;
4. Ceramic plunger;
5. Pressure adjustable;
6. Built-in self suction unloader;
7. Quick connect outlet;

BS-P250B



Optional:

1. Fixed rate chemical injector
2. Pressure gauge
3. Thermal relief valve

Optional:

1. Fixed rate chemical injector
2. Pressure gauge
3. Thermal relief valve

Model	Allow Max. Pressure		Water Flow		Hose Power		Driver		G.W	Packing Dim
	Bar	PSI	LPM	GPM	HP	R.P.M	Bent axle OD(mm)		Kg	L×W×H(mm)
BS-P250A	250	3600	15	4.0	13	3600	28		5.6	310×280×200
BS-P250B	250	3600	11	2.9	9.0	3600	24		5.6	310×280×200



SPARE PARTS



H01



H02



Water inlet hose



Max. Pressure : 2900PSI/200bar



H03



H04



M22x1.5



M14x1.5-M



3/8-M



3/8-F

Model	Max. Pressure	OD	Inlet		Outlet	
	PSI	mm				
BS-H01	2500	11	M22×1.5		M14×1.5-M	
BS-H02	2500	14	M22×1.5		M14×1.5-M	
BS-H03	2900	14	3/8-M	M22×1.5	3/8-F	M14×1.5-M
BS-H04	3600	18	3/8-M	M22×1.5	3/8-F	M14×1.5-M



G01 Max pressure: 4000PSI/275BAR
Max temperature: 60 C/140F
Max flow: 18LPM/6GPM



G02 Max pressure: 2900PSI/200BAR
Max temperature: 60 C/140F
Max flow: 15LPM/4GPM



J Spary gun pole



U Spary gun pole



0° 15° 25° 40° Chemical nozzle

Stainless steel nozzle



Turbo nozzle
Max. pressure 4000PSI



Turbo nozzle
Max. pressure 3400PSI



Sewer clean nozzle



TAIZHOU BISON MACHINERY CO., LTD

Add: 2/F, Build.D, Fangyuan Business Park,
No.155 West Taihe Road, Jiaojiang,
Taizhou City, Zhejiang Province, China
Tel: 0086-576-88205202
Fax: 0086-576-88017986
Web: www.bisonpower.net



FACEBOOK



BISON WEB



WECHAT